

Rational Application Developer v7.0 (RAD7) trial version. Installation guide



Warning: You cannot use ghosting or disk imaging to install this software. You must install the software on each machine separately. Do not change the computer hostname after this software is installed. Also, do not install this software from a network share. It will only function partially if you do.

1. Copy the content of the 10 CD's of **Rational Application Developer RAD V7.0 trial** to **C:\Software\RAD7**
2. From C:\Software\RAD7\disk1 run **launchpad.exe** file to start the installation.
3. The IBM Software Development Platform window will appear. Click the **Install IBM® Rational® Application Developer V7.0** link.


IBM Software Development Platform Language selection: English

 **IBM® Rational® Application Developer V7.0**
IBM® Rational® Application Developer for WebSphere® Software is a comprehensive integrated development environment with full support for the J2EE programming model, including accelerated Web, Java™, Web services, and EJB development.
[Install IBM® Rational® Application Developer V7.0](#)


 **Install Optional Products**
[WebSphere® Portal V6.0 test environment](#)
[WebSphere® Portal V5.1.0.1 test environment](#)
[Rational® Agent Controller](#)
[IBM® Rational® ClearCase® LT](#)
[Crystal Reports® Server XI Release 2](#)

 **View Release Information**
[Readme](#)
[Installation Guide](#)


4. The **Welcome to InstallShield Wizard for IBM Installation Manager** appears. Click **Next**.

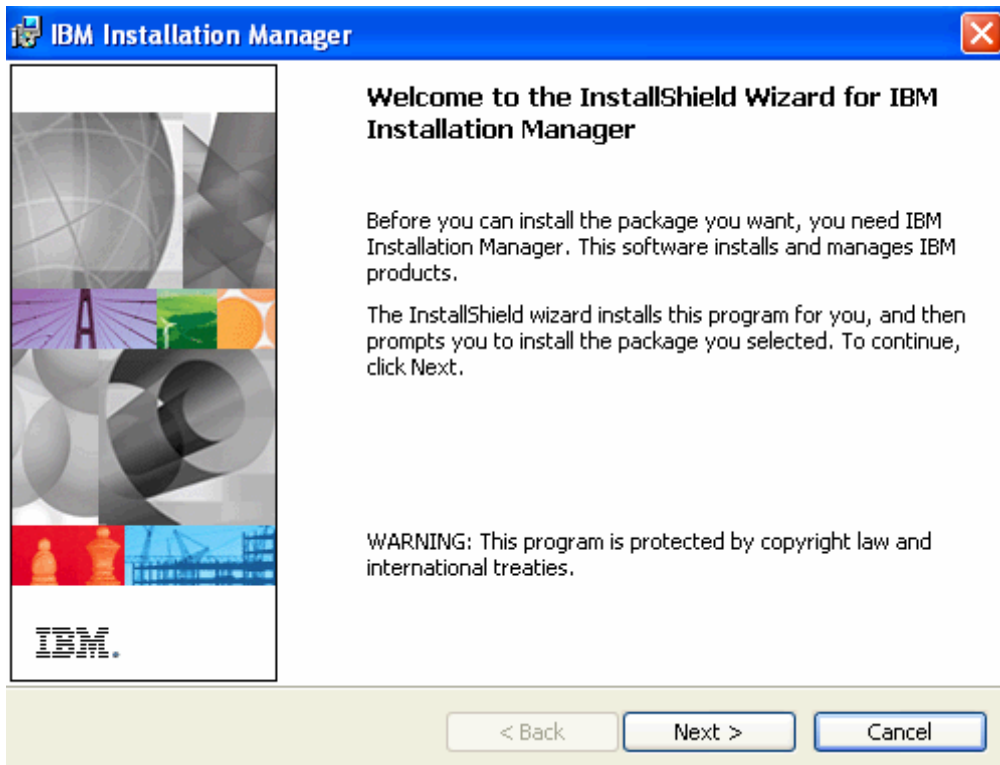


5. Accept the terms in the licence agreement. Click **Next**.

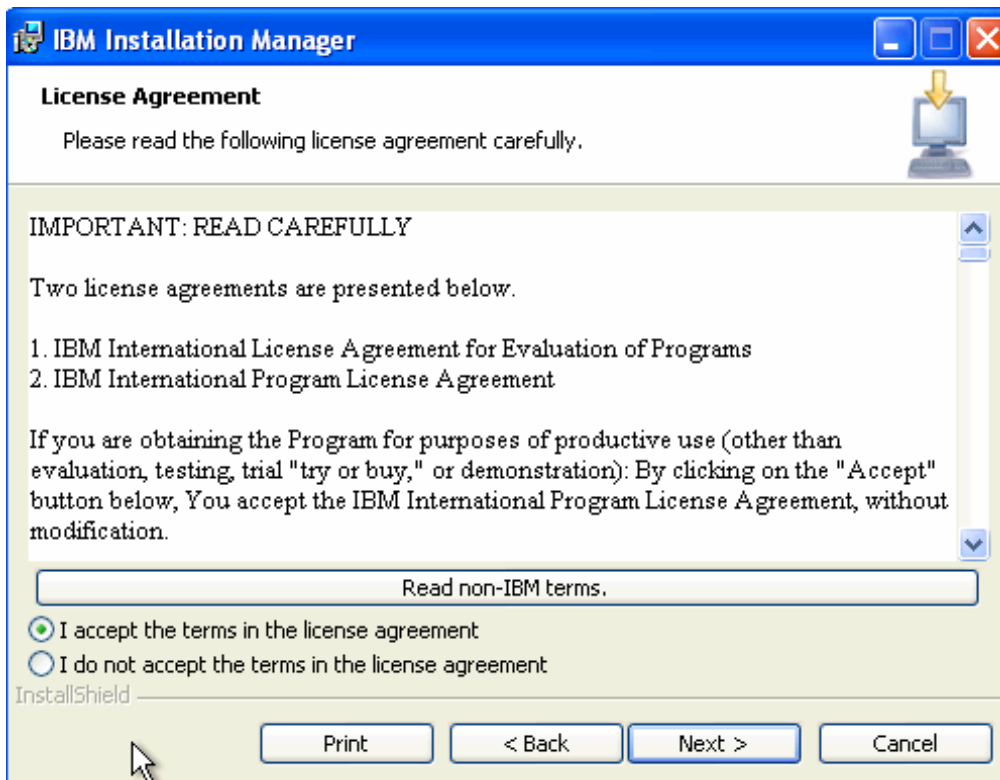


6. Leave the default as destination folder. Click **Next**.

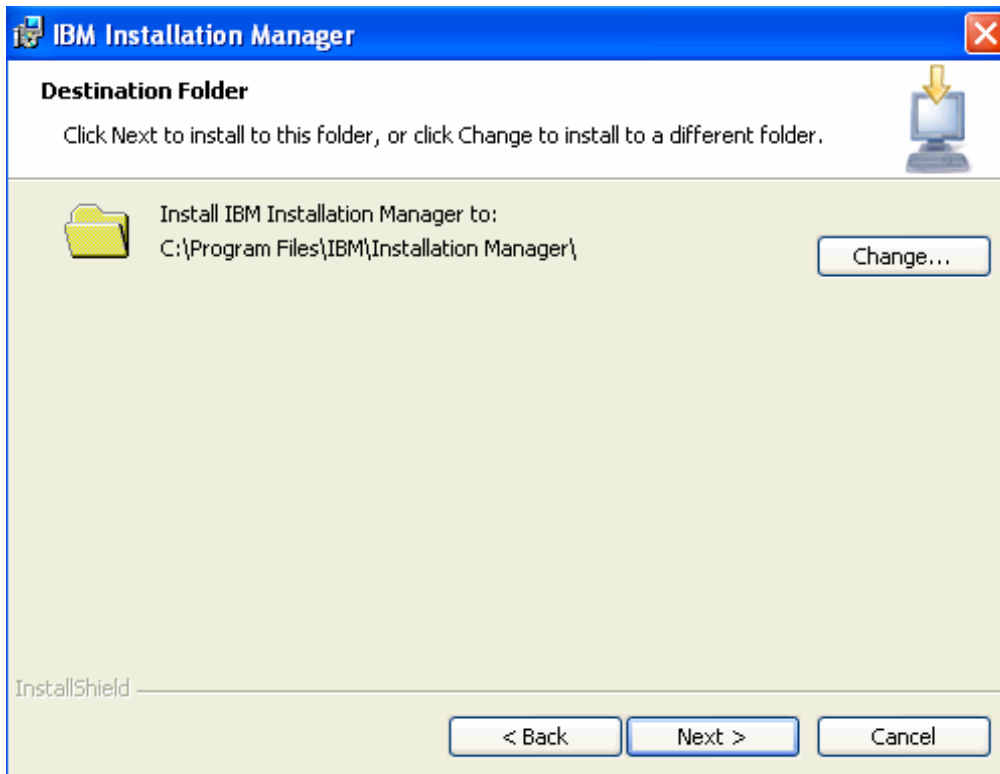


7. Click the **Install** button to start the installation Manager.

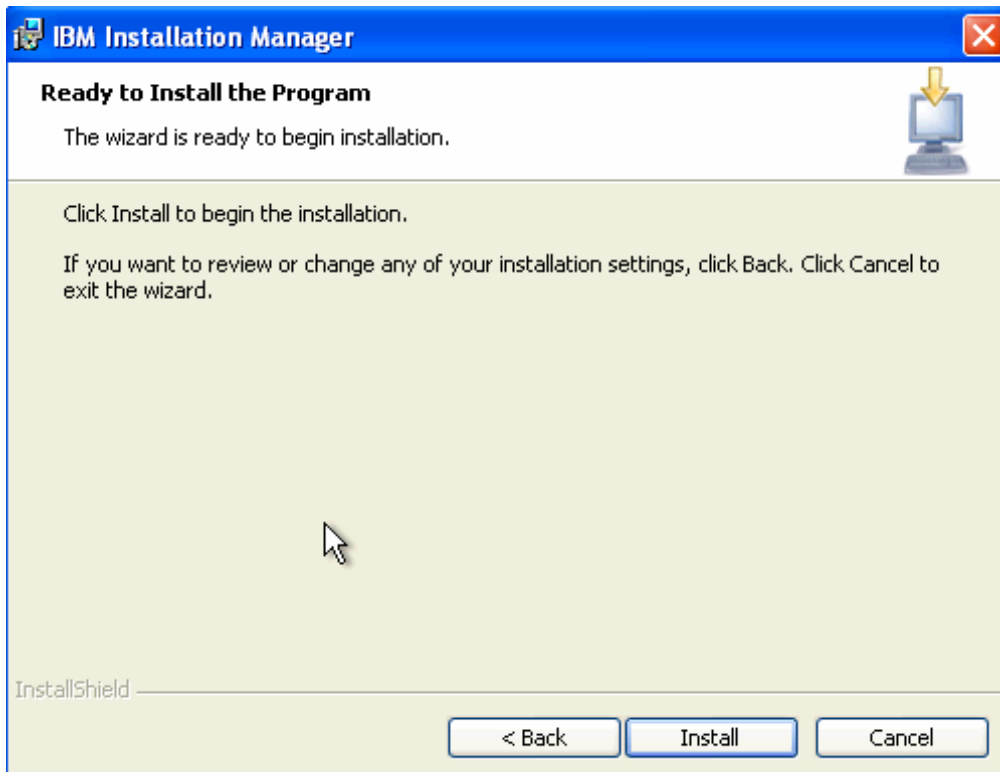


8. When the InstallShield Wizard has done press **Finish**.

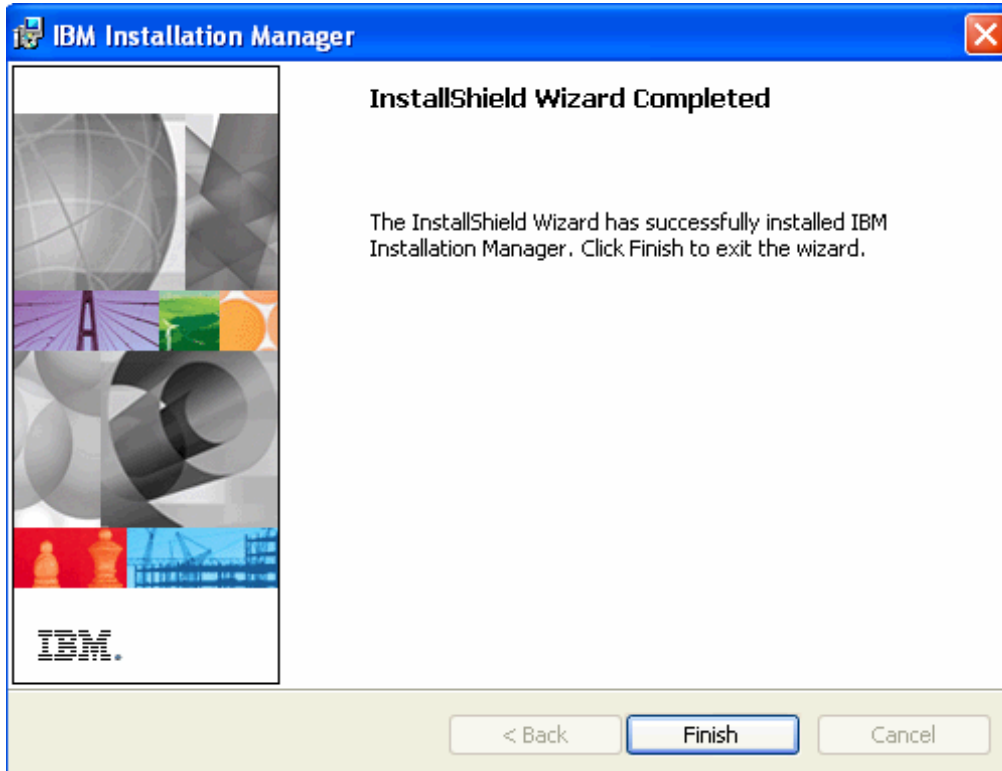


9. The Install Packages window will appear. Select **IBM Rational Application Developer** if it is not checked. Click **Next**.

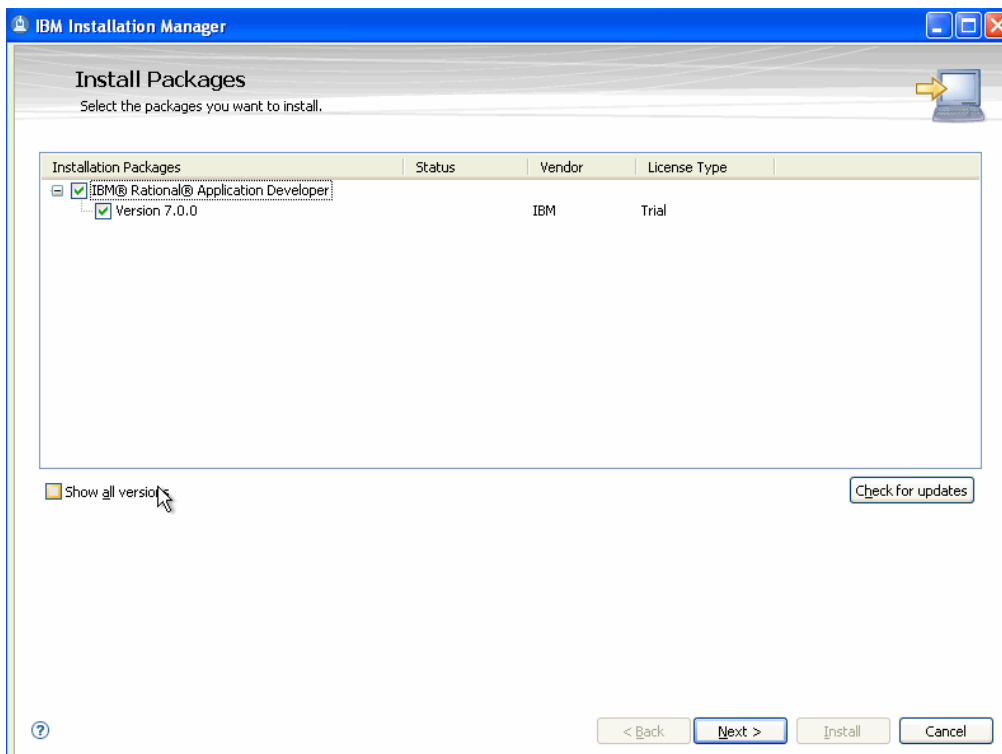


10. Accept the terms in the licence agreements and Click **Next**.

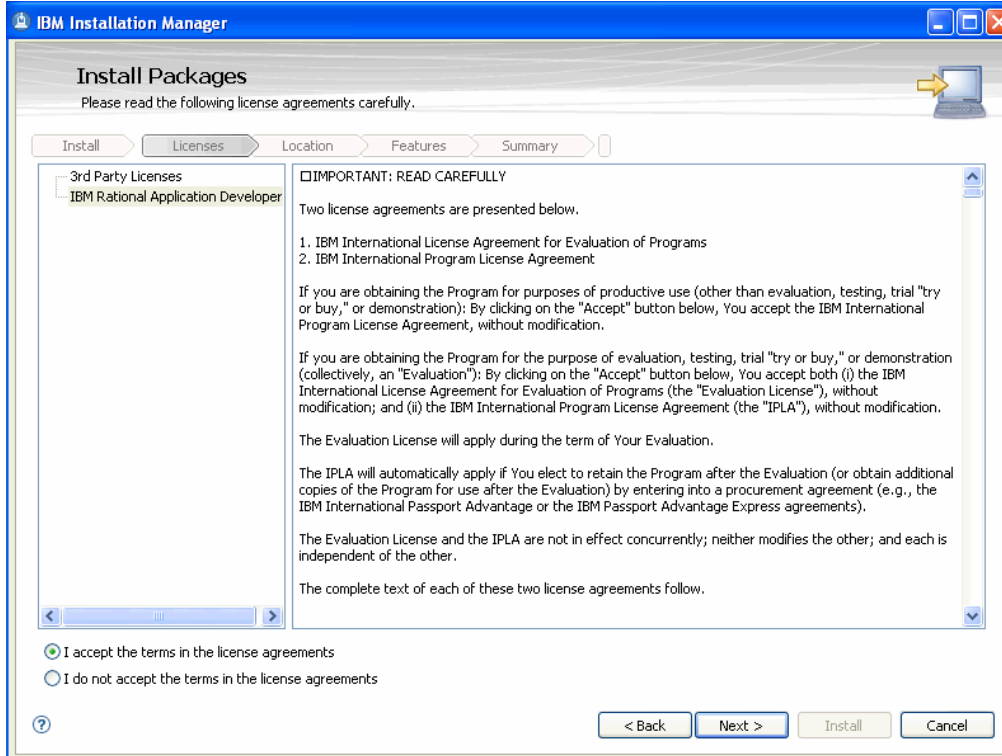


11. Leave the default directory for Shared Resources Directory and Click **Next**.

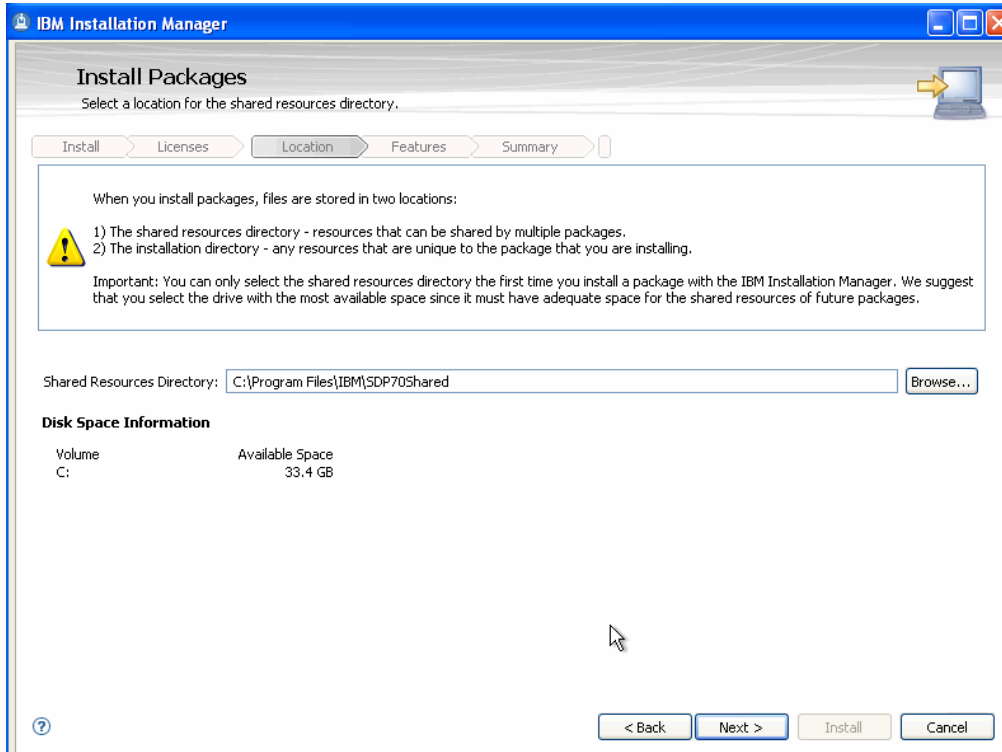


12. Change the installation Directory for IBM Software Development Platform to **C:\RAD7**. If you leave the default directory can cause errors in the Labs because the path is too long. Click **Next**.

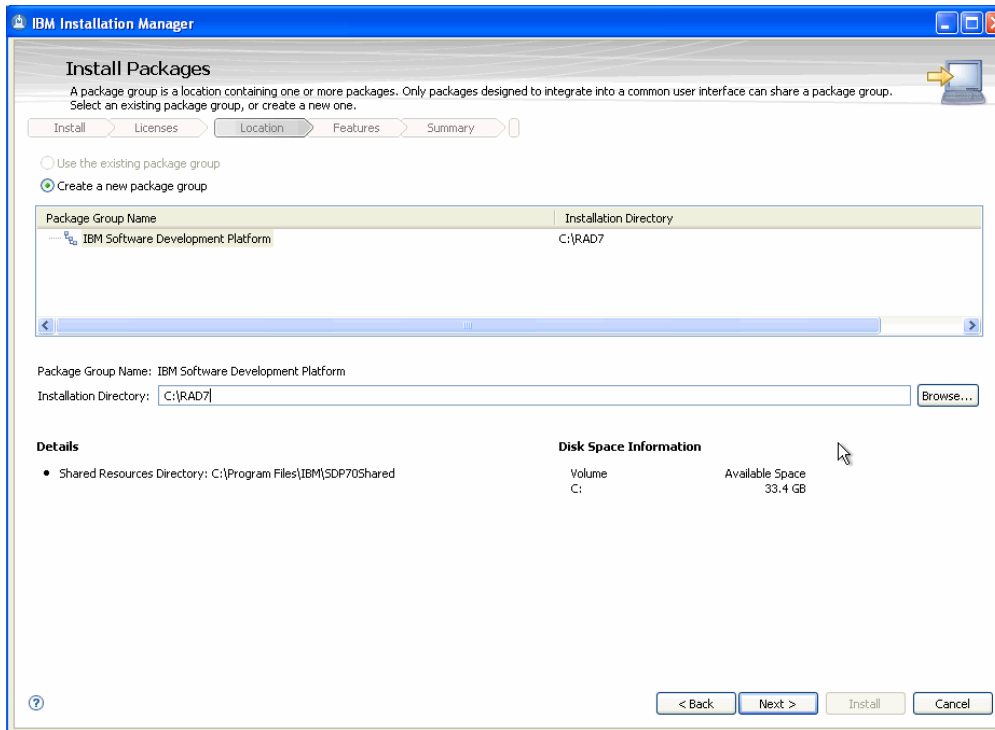

13. Leave unchecked the check box for extend an existing Eclipse and Click **Next**.

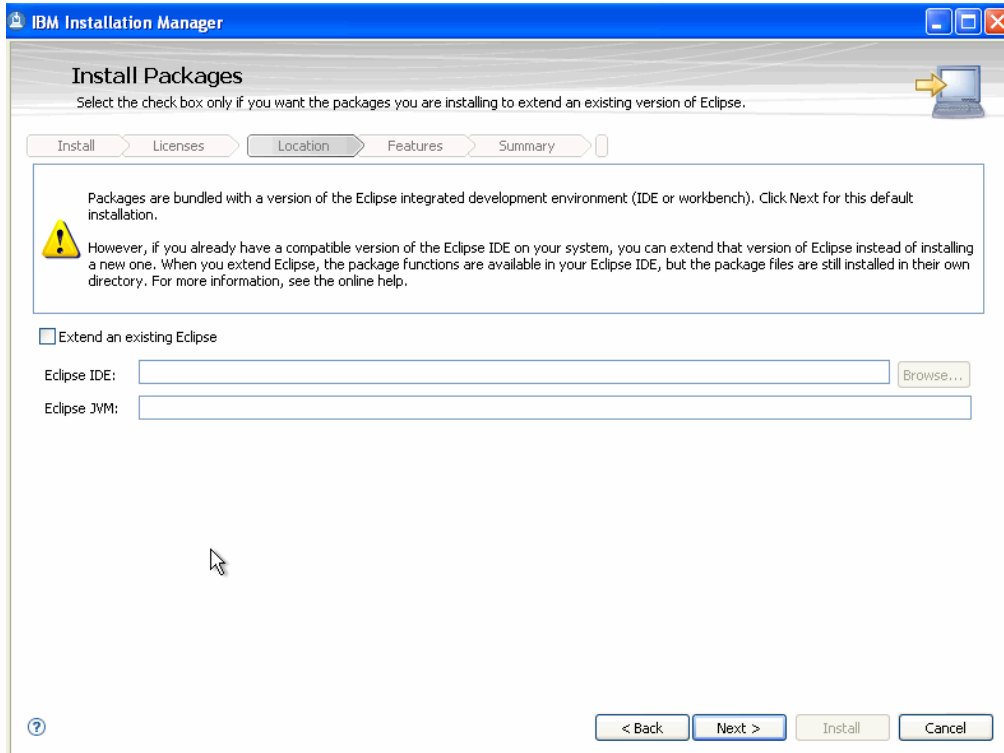


14. In the Languages screen just Click **Next**.

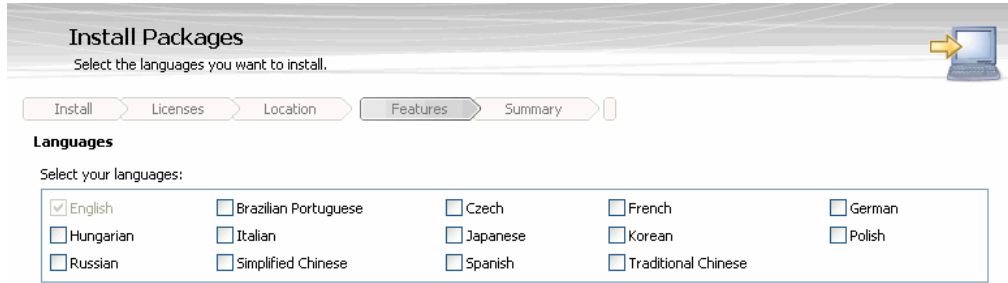


15. In the features to install window do the following changes and Click **Next**:


- Check **Struts Tools** inside Web Development Tools.
- Uncheck **Crystal Reports tools** inside Web Development Tools.

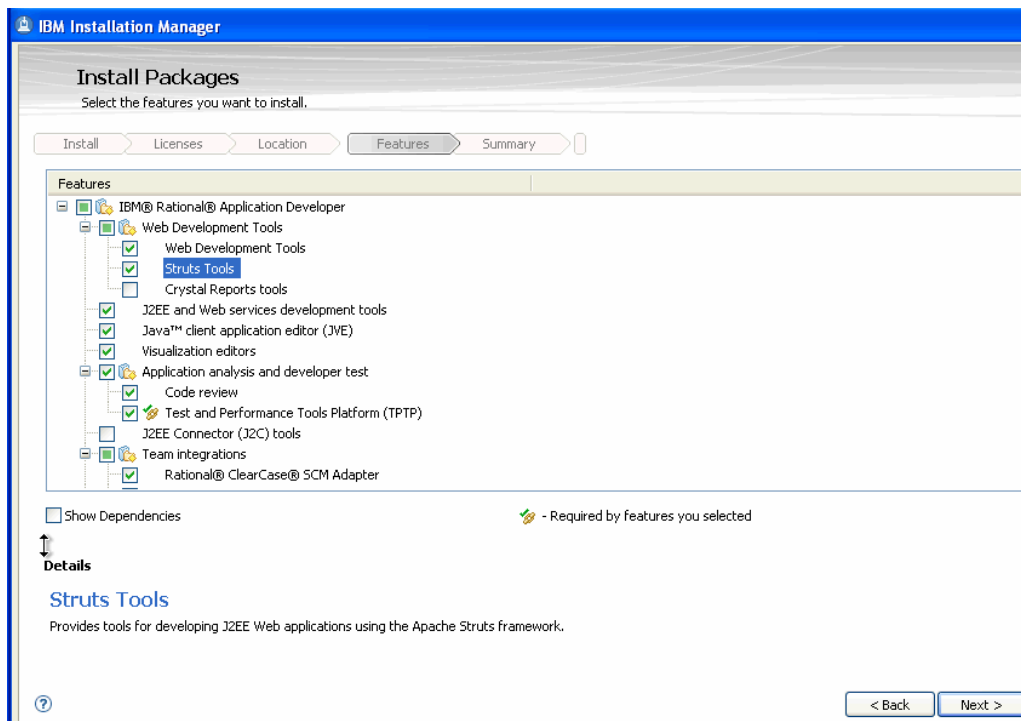

16. At the summary page review the information and Click **Install**. Wait patiently while the program is installed.

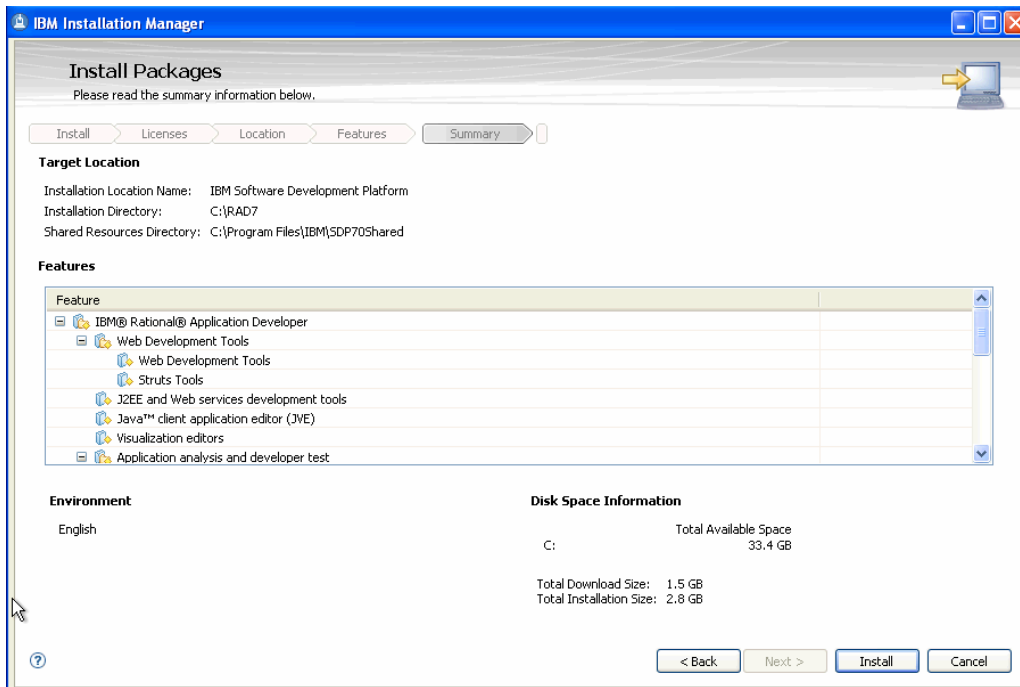

17. When you receive the Success message select **None** in the right panel and click **Finish**.

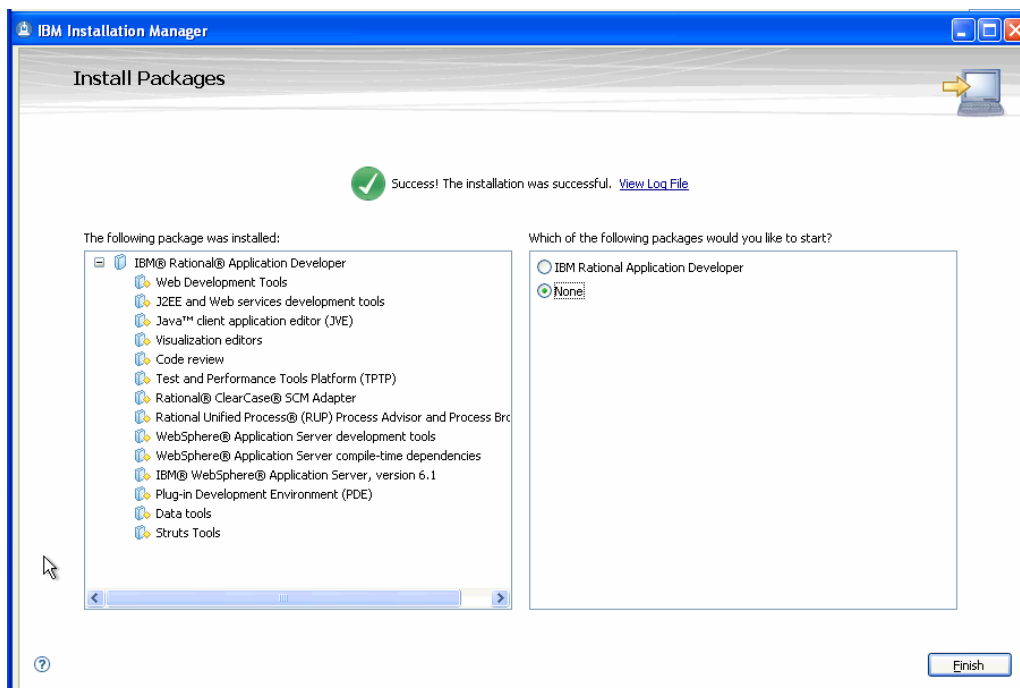


Installing Agent Controller 7 for RAD V7.0


18. Copy the content of the **Agent Controller 7 for RAD V7.0** CD to **C:\Software**
19. From **C:\Software\Agent Controller v7 for Windows** run the program **setup.exe**
20. At the welcome screen click **Next**.




21. Accept the terms in the licence agreement and click **Next**.

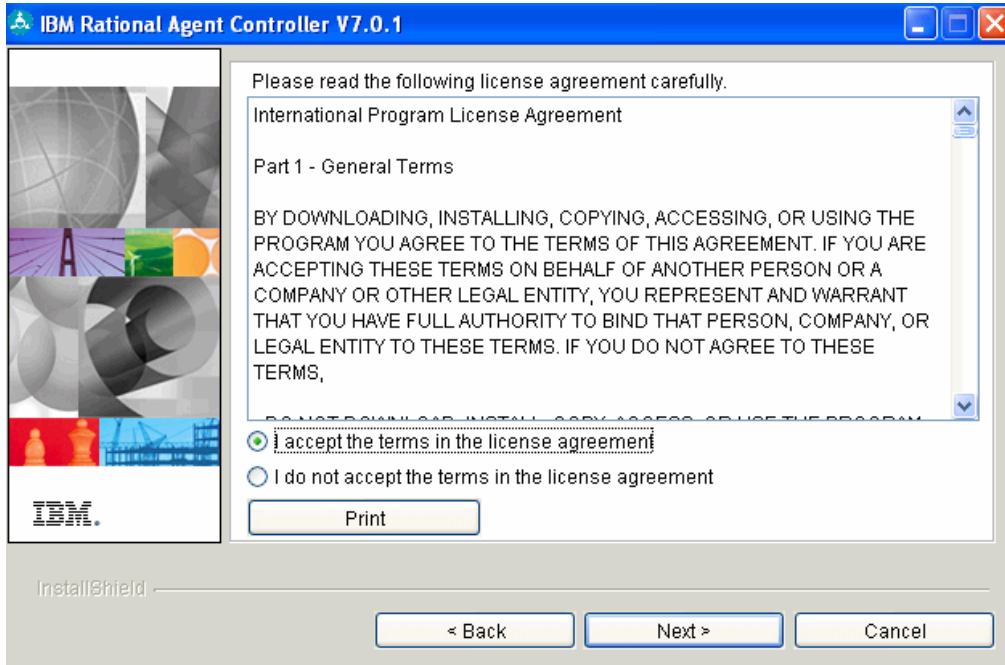


22. Leave the default directory to install IBM Rational Agent Controller and click **Next**.

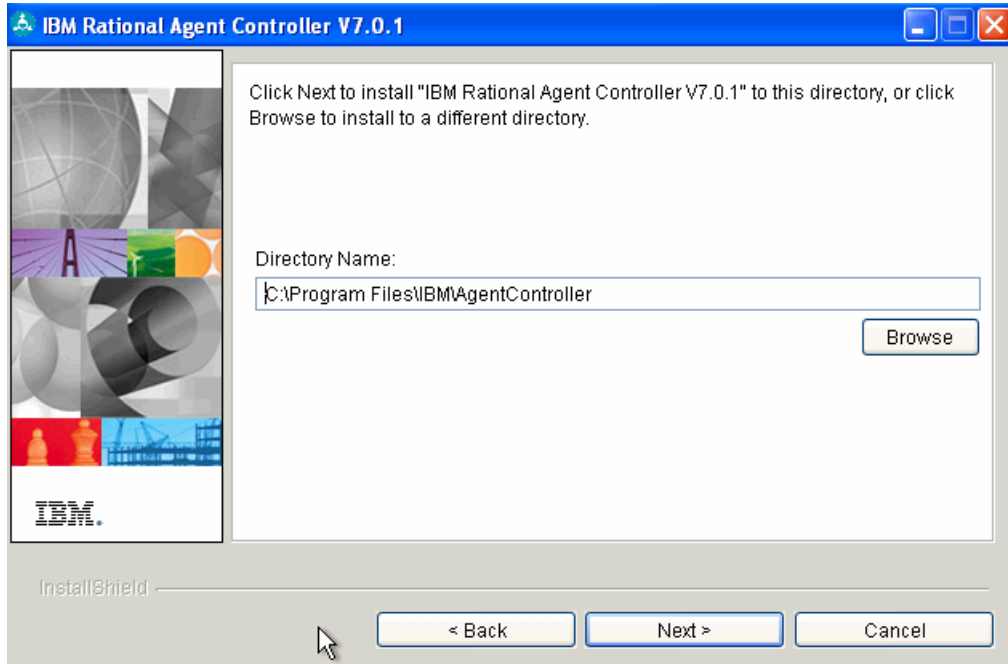


23. Press the browse button and select **C:\RAD7\runtimes\base_v61\java\jre\bin\java.exe** press **Open**. Back in the Agent controller installation window click **Next**. If you do not see the C:\RAD7\runtimes\base_v61\java\jre\bin folder, your RAD installation was not successful. Contact technical support right away.

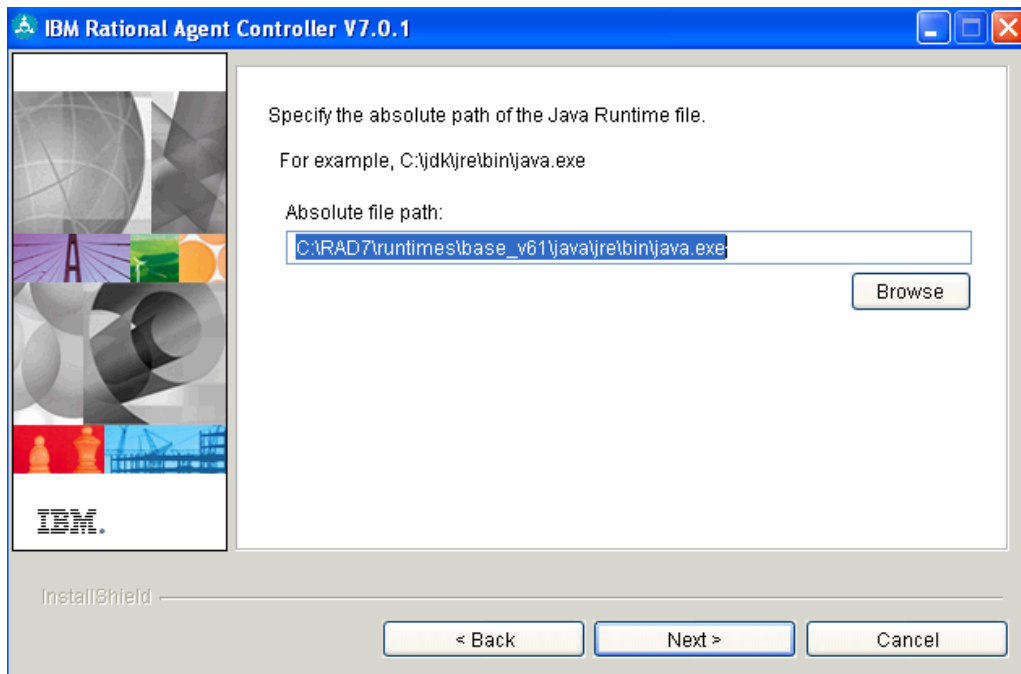


24. Leave **V6.0 or later** as the version of WebSphere Application Server and click **Next**.

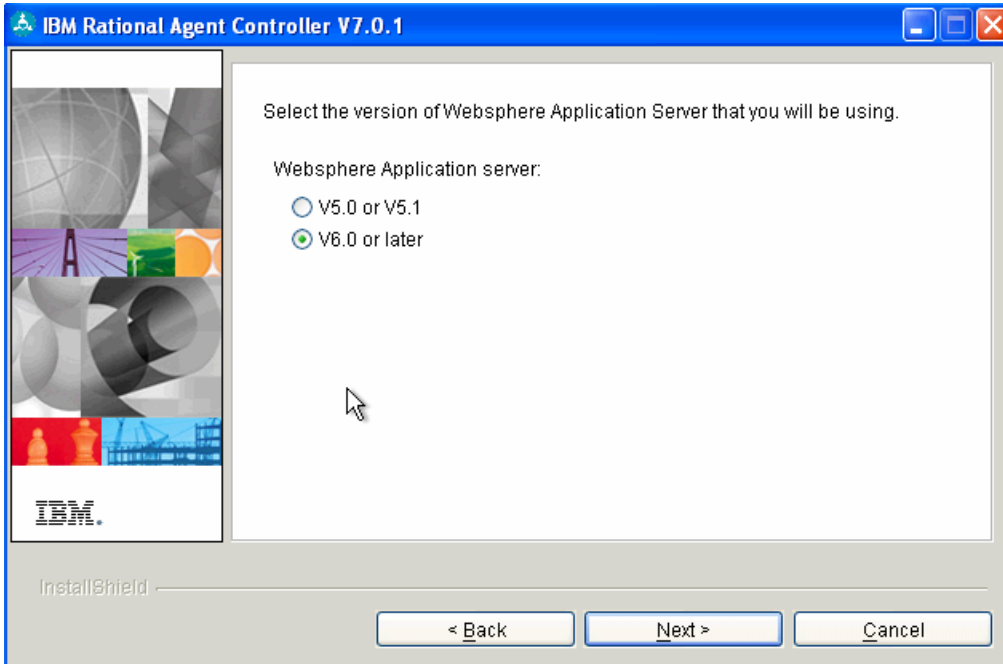


25. Ensure that the radio button for **Any Computer** option is selected and click **Next**.

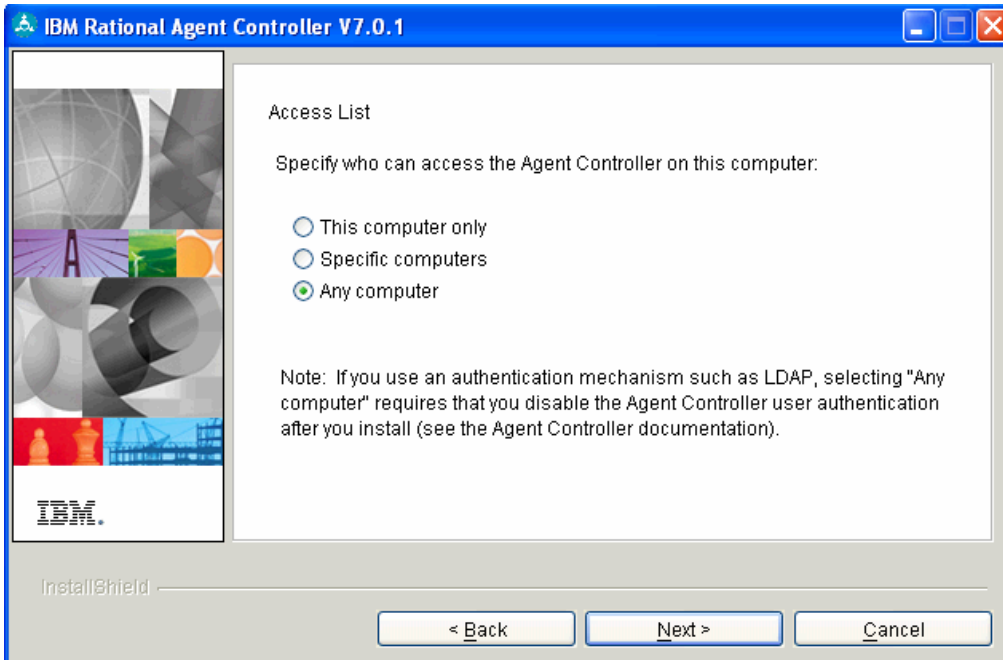


26. Click **Next** in the Security window.

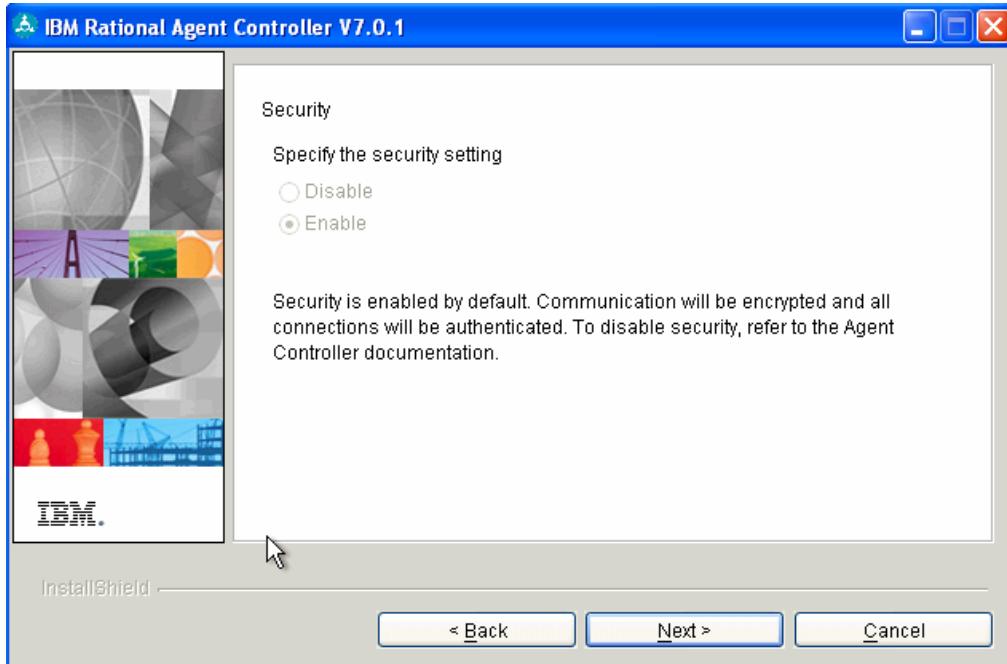


27. Enter **guest** in the text box and click **Next**.

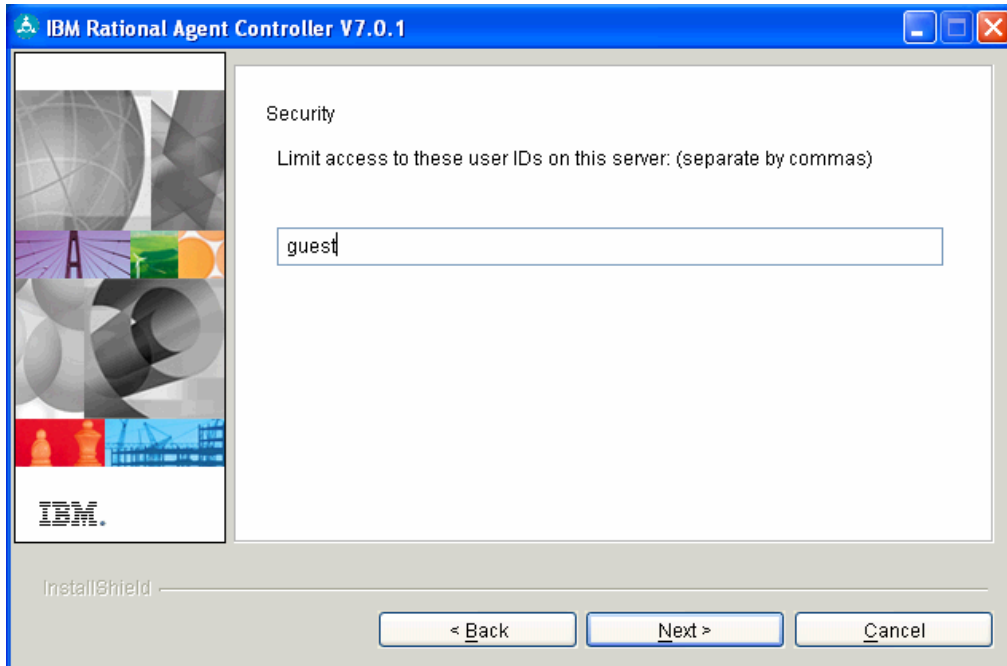

28. Read the summary information and click **Install**.

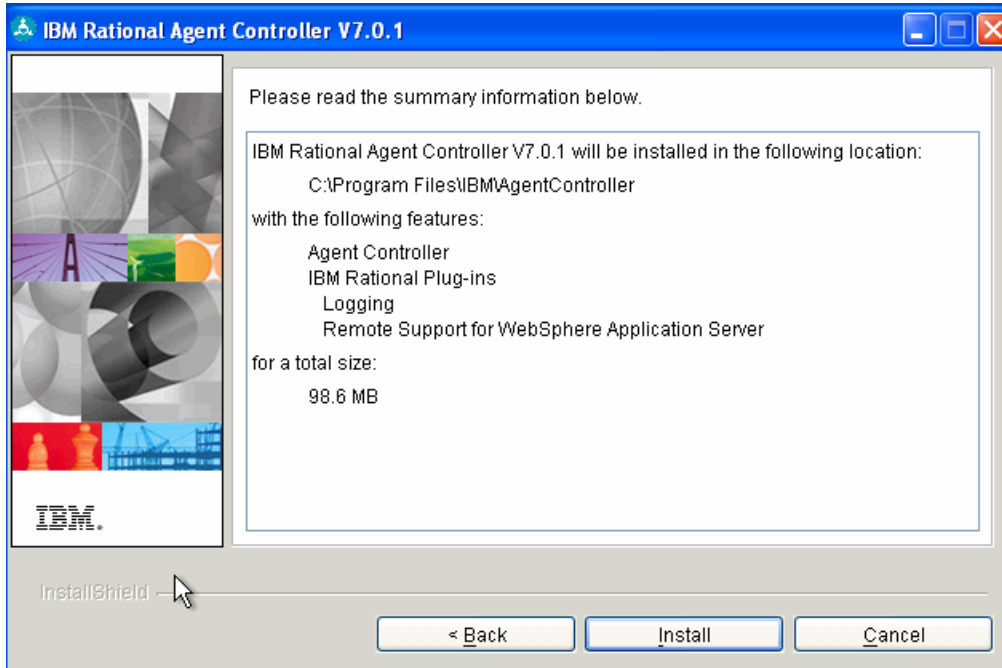


29. When the installation completes click **Finish**.

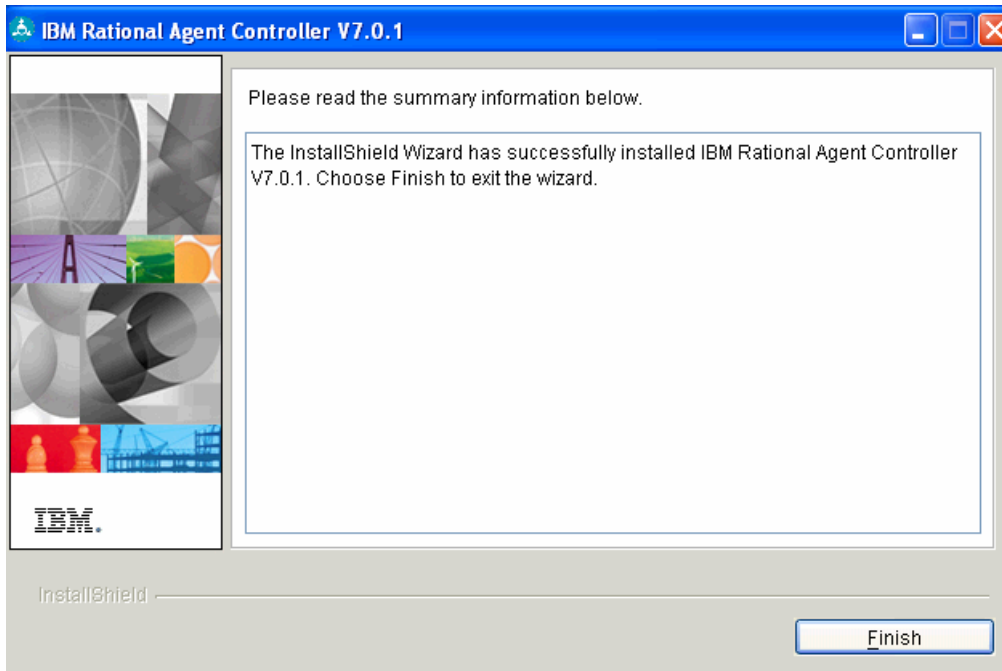


30. Start RAD 7. Select **Start -> Programs -> IBM Software Development Platform -> IBM Rational Application Developer -> IBM Rational Application Developer**.


31. In the workspace window change to **C:\workspace** and press **OK**.

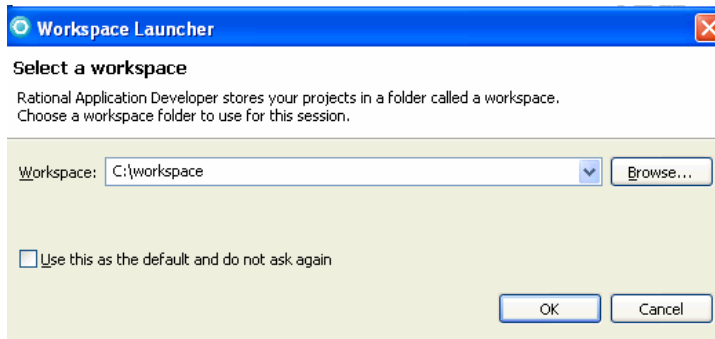

32. Close the Welcome screen.

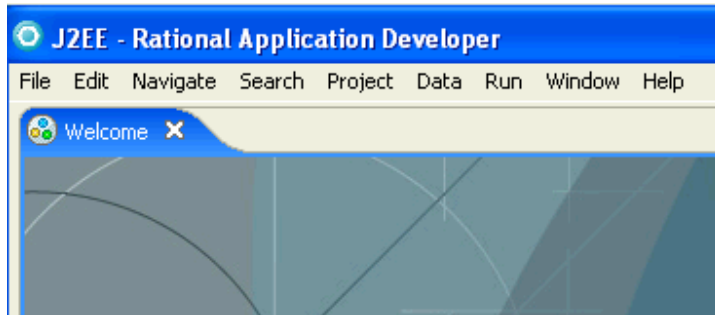


33. Click the Servers tab at the bottom panel and wait to see the **WebSphere Application Server v6.1** there. You may see the State being shown as “Republish” instead of Synchronized as shown below. This does not matter and can be ignored.

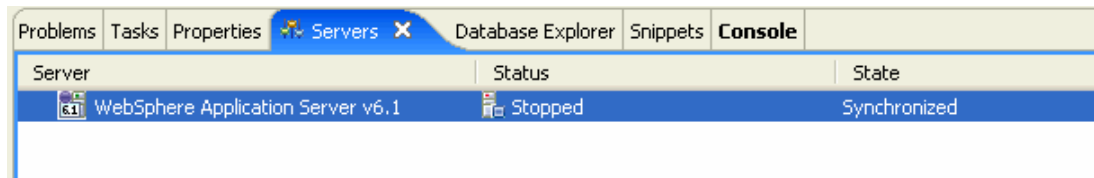

34. To start the Server right click in the **WebSphere Application Server v6.1** server and select **Start**.


35. The Console view will show some messages meanwhile the Server is started. You will see the message **Application started**.

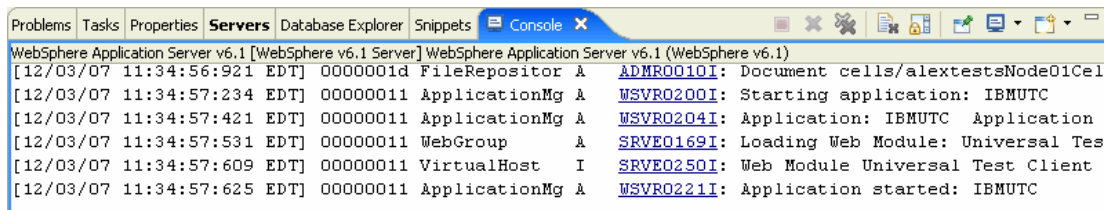


36. At the Servers view the status changed to Started for the **WebSphere Application Server v6.1**.



37. To stop the server right click on the server and select Stop. The server will change the status to Stopped.

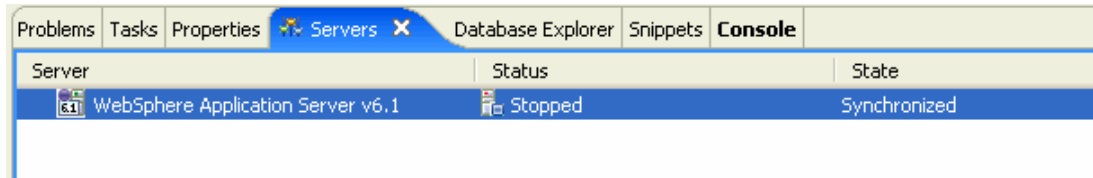

38. From the menu select **File -> Exit** to close Rational Application Developer.

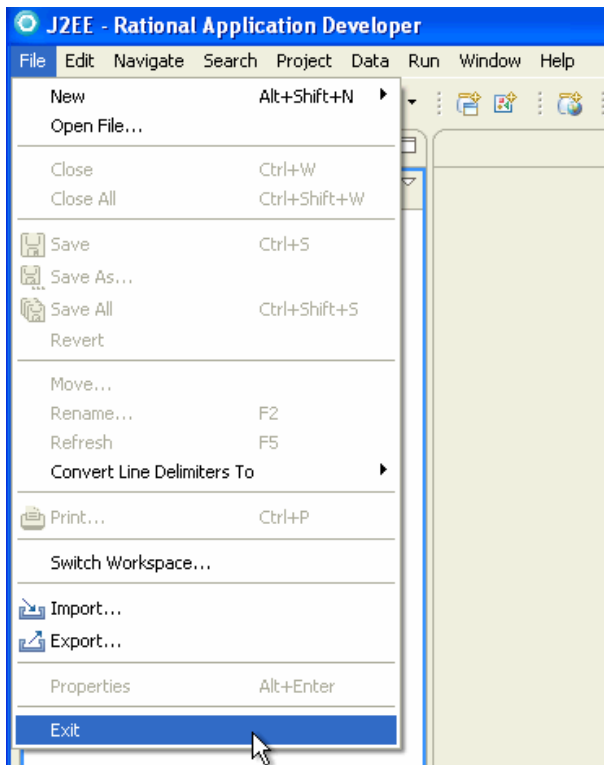

39. Close all open windows.